


### PRODUCT FEATURE

- 1.EFFECTIVE FASTENING CYLINDER WITHIN A FRAMEWORK;
- 2.EFFECTIVELY PREVENT THE CYLINDER KNOCK AGAINST;
- 3、EFFECTIVELY REDUCE THE FRAMEWORK CYLINDERS SPACE;
- 4.LIGHT WEIGHT, SIMPLE STRUCTURE, EASY TO DELIVERY;
- 5、ACCORDING TO USER'S ACTUAL SITE, EASY TO INSTALL LOCATION SELECTION;
- 6.SIMPLE CONNECTION OF COMPONENTS;
- 7.EASY FOR USERS TO OBSERVE THE CYLINDER PRESSURE;
- 8、ACCORDING TO CUSTOMER'S ACTUAL DEMAND, EASY TO ADJUST THE DISCHARGE PRESSURE;
- 9、CONNECTED TO THE CYLINDER IS CONVENIENT, FAST, WITHOUT ANY AUXILIARY TOOLS.



## SHORT DELIVERY SOLUTION

1. TROLLEY HAS SIMPLE STRUCTURE, EASY TO OPERATE;
2. EASY TO INSTALL TROLLEY AND CYLINDER, NO SPECIAL FASTENING;
3. EFFECTIVELY PREVENT THE GAS CYLINDER IN THE PROCESS OF TRANSPORTATION KNOCK AGAINST;
4. THE CYLINDER CAN BE PLACED IN ANY POSITION;
5. LIGHT WEIGHT, SIMPLE STRUCTURE, EASY TO SHORT DELIVERY.

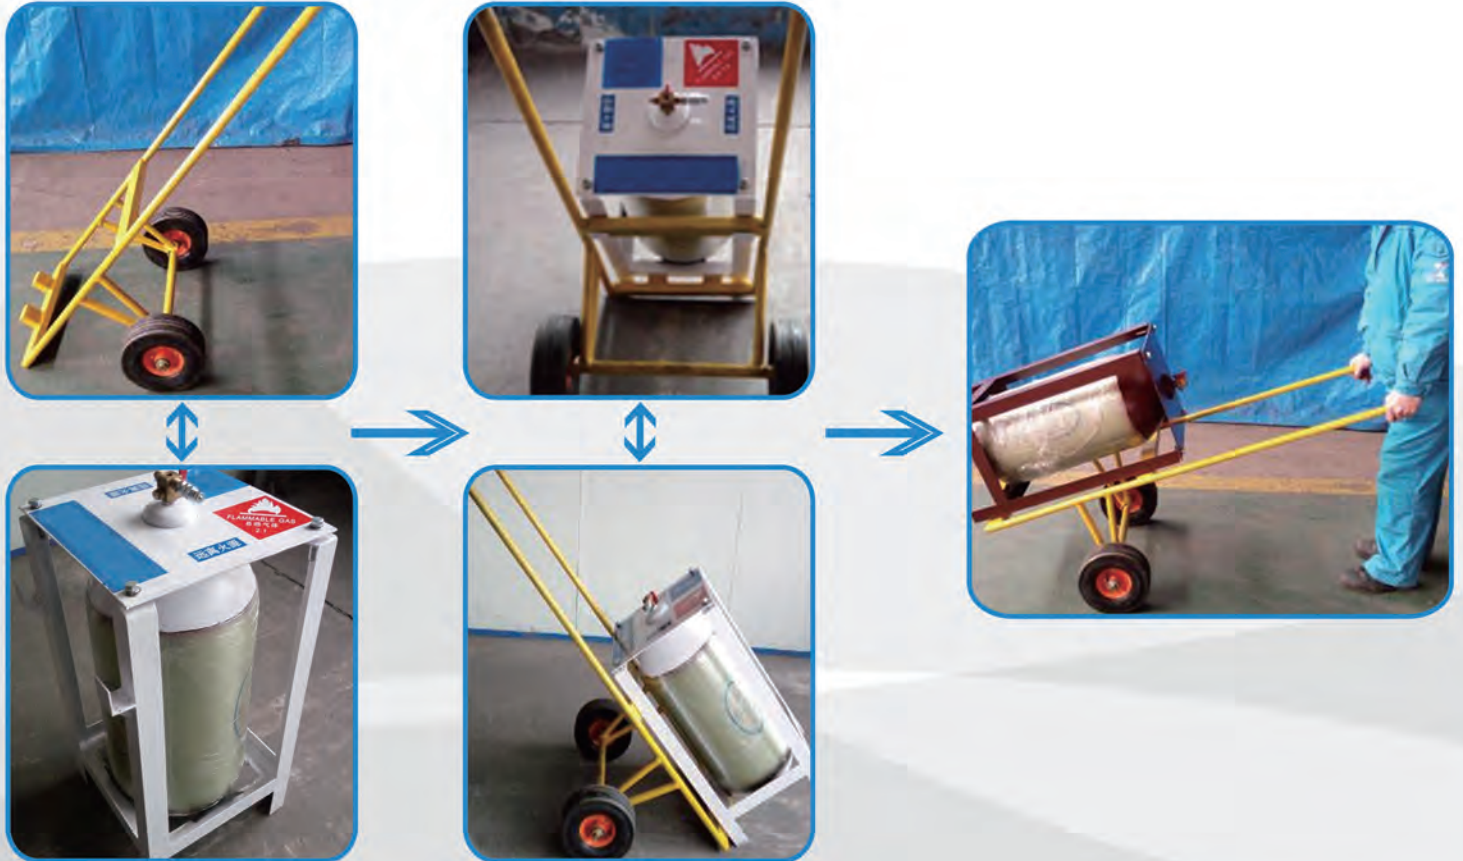

## TECHNICAL PARAMETER

SN.	MODEL	WORKING PRESSURE	CNG LOADING VOLUME(NM3)	CORRESPONDING TO LPG VOLUME(KG)
1	SR-CNG2-356-55	20MPA	15.00	19.50
2	SR-CNG2-356-60		16.38	21.28
3	SR-CNG2-356-65		17.75	23.00