

WE COOPERATE WITH WORLD FAMOUS COMPRESSOR MANUFACTURER AND PACKAGE IN CHINA. PROVIDE QUALIFIED PRODUCT AND SAVE COST FOR CUSTOMER AT THE SAME TIME.

MOTHER STATION MODEL:



**INLET PRESSURE :**

**0.05 MPA-8 MPA**

**OUTLET PRESSURE : 25 MPA**

**POWER : 280KW- 400 KW**

**RPM : 1485RPM**

**COMPRESSOR STAGE : 2, 3, 4**

INLET PRESSURE BAR	OUTLET PRESSURE BAR	MODEL	MOTOR KW	CAPACITY M3/H	RPM	DIMENSION MM	WEIGHT T
1-3	250	SR4-1800/3-250	355	879-1837	1500	3600X2700X3250	15
2-4	250	SR4-2200/4-250	400	1279-2190	1500	3600X2700X3250	15
4-6	250	SR4-2400/6-250	400	1699-2420	1500	3600X2700X3250	15
8-12	250	SR4-2800/12-250	400	1863-2810	1500	3600X2700X3250	15
10-16	250	SR4-3000/16-250	400	1964-3036	1500	3600X2700X3250	15
16-25	250	SR4-3500/25-250	330	1844-3475	1500	3600X2700X3250	15
18-35	250	SR4-4000/35-250	315	1589-3938	1500	3600X2700X3250	15
25-40	250	SR4-5000/40-250	400	2808-5066	1500	3600X2700X3250	15
30-50	250	SR4-5500/50-250	355	2193-5540	1500	3600X2700X3250	15
40-60	250	SR4-6400/60-250	355	3924-6380	1500	3600X2700X3250	15



## DAUGHTER STATION MODEL :

**MOTOR :**


**75 OR 90KW**

**INLET PRESSURE : 2.5-20 MPA**

**OUTLET PRESSURE : 25 MPA**

**RPM : 1485RPM**

**AVERAGE CAPACITY : 1650 OR 1985NM<sup>3</sup>/H**

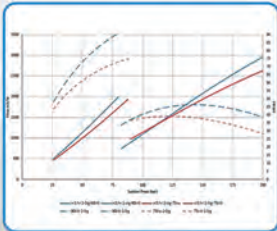

INLET PRESSURE BAR	OUTLET PRESSURE BAR	MODEL	MOTOR KW	CAPACITY M <sup>3</sup> H	RPM	DIMENSION MM	WEIGHT T
25-200	250	SR1-1650/42-250	75	1650	1500	2700X2400X2700	6
25-200	250	SR1-1985/50-250	90	1985	1500	2700X2400X2700	6

## CNG REFILLING STATION



### ONLINE STATION MODEL :

**INLET PRESSURE :**

**0.05 MPA-6 MPA**

**OUTLET PRESSURE : 25 MPA**

**MOTOR : 110 KW- 200 KW**


**RPM : 1500RPM**

**COMPRESSOR STAGE : 2, 3, 4**



INLET PRESSURE BAR	OUTLET PRESSURE BAR	MODEL	MOTOR KW	CAPACITY M <sup>3</sup> /H	RPM	DIMENSION MM	WEIGHT T
1-3	250	SR2-830/3-250	160	400-830	1500	2900X2500X3100	8
2-4	250	SR2-1000/4-250	185	503-1018	1500	2900X2500X3100	8
4-6	250	SR2-1200/6-250	185	858-1225	1500	2900X2500X3100	8
8-12	250	SR2-1400/12-250	185	932-1405	1500	2900X2500X3100	8
10-16	250	SR2-1600/16-250	185	1000-1600	1500	2900X2500X3100	8
16-25	250	SR2-1900/25-250	185	1200-1899	1500	2900X2500X3100	8
18-35	250	SR2-2200/35-250	185	968-2210	1500	2900X2500X3100	8
25-40	250	SR2-2250/40-250	185	1270-2258	1500	2900X2500X3100	8
30-50	250	SR2-2800/50-250	185	2140-2811	1500	2900X2500X3100	8
40-60	250	SR2-3300/60-250	185	2045-3328	1500	2900X2500X3100	8

## INTEGRATED STATION SOLUTION:

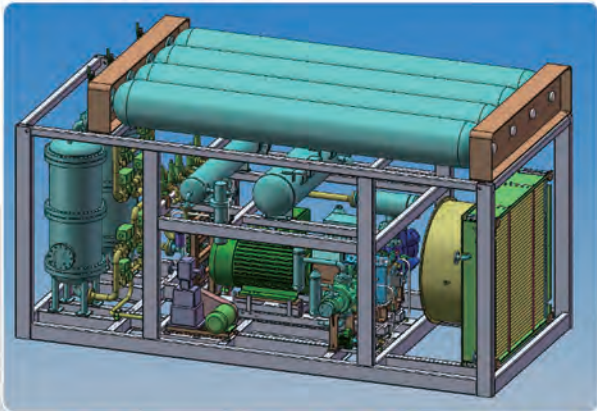

### INTEGRATED STATION ADVANTAGE

SAVE SPACE, SUITABLE FOR CITY STATIONS MIX WITH GASOLINE AND NATURAL GAS.  
CAN INSTALL OUTSIDE, EASY FOR INSTALLATION.

HIGH INTEGRATED SOLUTION, ALL EQUIPMENTS ASSEMBLE IN ONE SKID, EASY TO MOVE.  
EQUIPMENT MODULARIZATION, CAN DESIGN ACCORDING TO CUSTOMER REQUIREMENTS.

#### NOTE:

ALL KINDS OF COMPRESSORS CAN BE DESIGNED ACCORDING TO CUSTOMER'S REQUIREMENTS.